







XX-315

(China, Europe) Series
脚踏式 Foot Type

RoHS PAHS NP REACH



Shapes and dimensions 形状和尺寸

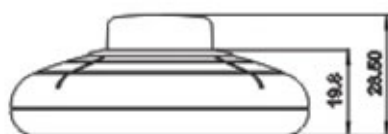

Unipolar
单极

Applications 用途

适用于各种携带电源线控制的灯具、电器、变压器。
It's applicable for various lighting apparatus,
electrical apparatus and transformers with power
line

Features 特长

外壳采用工程塑料PC，确保开关高可靠性。
PC engineering plastic housing, Ensuring high reliability of
switch
适用Applicable
H03VVH2-F2 x 0.75mm²
H03VVH2-F3 x 0.75mm²
装配方式：螺丝装配。
Mounting mode: Screw fitting

List of Product Performance 产品性能一览

环境温度(Environmental temperature)	-40℃ ~ +85℃	耐电压(Withstand voltage)	≥ 2500V/5S/0.025MA
额定电流、电压(Rating)	2⊗1/250V	冲击电压(Percussive voltage)	0.5NM ± 0.04NM
接触电阻(Contact resistance)	≤ 0.02 Ω	拉力测试(Tensile testing)	30N/min
绝缘电阻(Insulation resistance)	≥ 100M Ω	操作寿命(Operational life)	10000次
介电强度(Dielectric strength)	≥ 1500VAC/min	燃烧性(Combustibility)	94V 2级